

Weakley County Municipal Electric System
INTERCONNECTION PROCEDURES
FOR RENEWABLE DISTRIBUTED GENERATION

1. GENERAL PROCEDURES & STANDARDS

1.1 Scope

These procedures describe the steps Interconnection customers (herein after called customer) must follow in order for their renewable distributed generation equipment (DG equipment) to be evaluated and approved for interconnection to the Weakley County Municipal Electric System (hereinafter called Distributor) distribution system for parallel operation. TVA's Green Power Providers program and Distributed Solar Solutions are currently the only avenue available through WCMES that the customer can receive compensation for energy generated. Requirements for interconnection will be based on the size of the system and will be broken into the following categories:

Tier 1 – 10 KW or less

Tier 2 - Greater than 10 KW and less than or equal to 100 KW

Tier 3 - Greater than 100 KW and less than 1 MW

1.2 Application for Interconnection

Customers can go on-line to the TVA.gov web site under generation/renewables to find how to apply for the Green Power Providers Program as well as the Distributed Solar Solutions . Each customer must submit a completed application to Distributor prior to purchasing any DG equipment. If the equipment meets the criteria for Tier 1, complete the application in Attachment 1. If the system meets criteria for Tier 2 or 3, complete the application in Attachment 2. Please provide the supporting documents identified with each application.

1.3 Application Processing (See Figure 1)

1.3.1 The Distributor will review the application for sufficiency and completeness and notify the customer that it has received all documents required or indicate how the application is deficient.

1.3.2 The Distributor will evaluate the system using the criteria of Section 2 Fast Track Screening Process to determine if an interconnection study is necessary. If the project does not pass the Fast Track Screening Process, the requirements outlined in Section 3 Study Process will be followed. Otherwise, the Distributor will notify the customer that they may proceed with purchase and installation of the project and will send a completed interconnection agreement to the customer for execution. The customer will also be notified of any additional requirements. **Customer will not be allowed to proceed with parallel operation until all provisions of these procedures have been met and Distributor has given written notification to proceed with parallel operation.**

1.3.3 The customer must execute the interconnection agreement and return it to the Distributor at least 30 calendar days prior to the desired date of parallel operation and within one year after the distributor executes the agreement.

- 1.3.4. After installation, the Customer returns the Certificate of Completion to the Distributor. Prior to parallel operation, the Distributor may inspect the DG equipment for compliance with the proposed design and may require a Commissioning Test in accordance with the procedures defined by the latest version of IEEE 1547.1. Distributor will have the option of witnessing the Commissioning test or may require documentation from the equipment owner describing which tests were performed and their results. The Distributor will offer to complete any required Commissioning Tests as soon as possible.
- 1.3.5. If the inspection of the completed system and any required Commissioning test are satisfactory, the Distributor will notify the Customer in writing that interconnection of the DG Equipment is authorized for parallel operation. If the system does not pass the inspection and/or Commissioning test, the Distributor has the right to Lockout the Facility. The Customer shall not under any circumstance take any action to operate the system in parallel until the problems have been corrected and a new inspection and Commissioning test are performed, or waived by the Distributor.

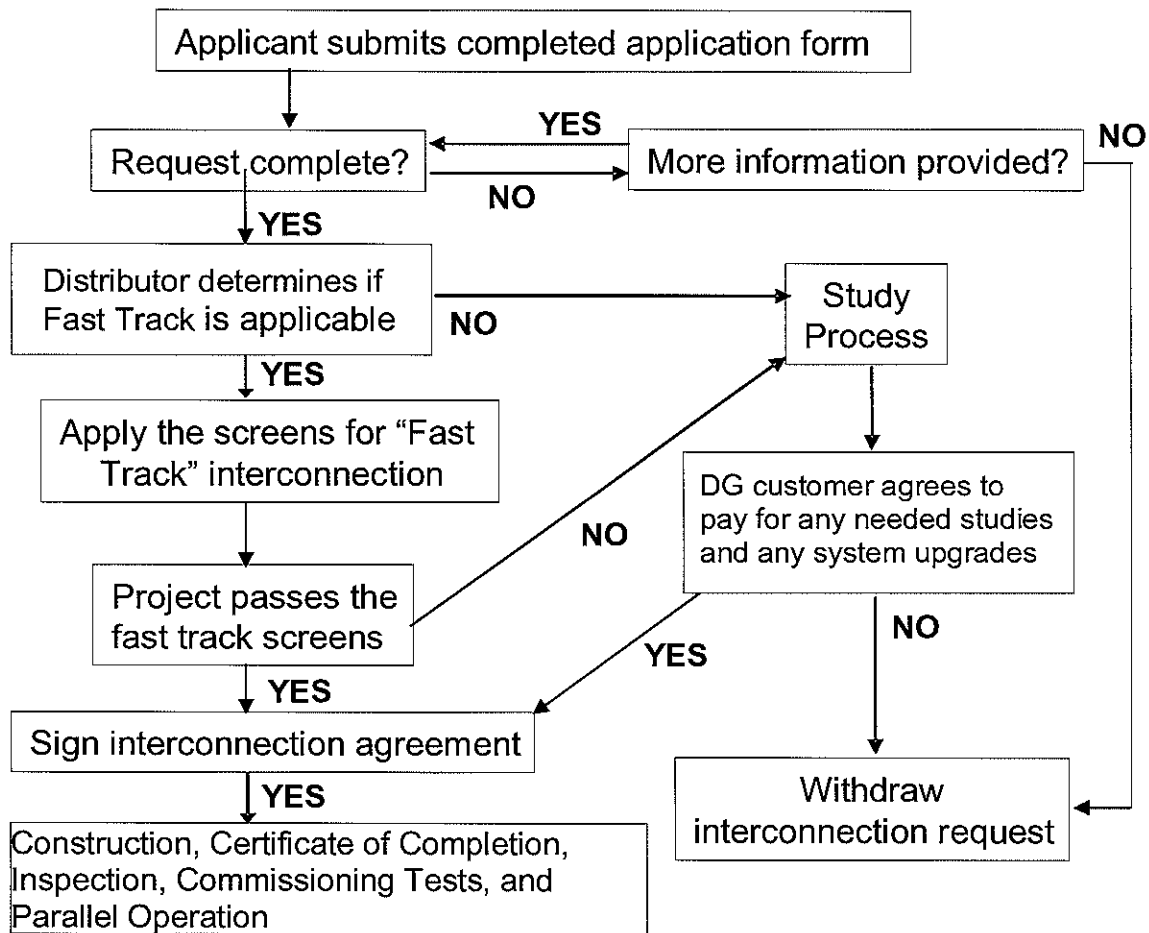


Figure 1. The Application Process

1.4. Standards and Certification Criteria

The DG equipment must comply with the latest revision of the following standards and the customer must provide evidence of certification with the DG Equipment Application or with the Certificate of Completion:

- 1.4.1. IEEE1547 Standard for Interconnecting Distributed Resources with Electric Power Systems (including use of IEEE 1547.1 testing protocols to establish conformity)
- 1.4.2. IEEE1547.1 Standard Conformance Test Procedures for Equipment Interconnecting Distributed Resources with Electric Power Systems
- 1.4.3. UL 1741 Inverters, Converters, and Controllers for Use in Independent Power Systems
- 1.4.4. NFPA 70 National Electrical Code
- 1.4.5. The DG Equipment shall be considered certified for interconnected operation if the generation equipment and all related interconnection components have been tested and listed by a Nationally Recognized Testing Laboratory (NRTL certification by Department of Labor) for continuous interactive operation with an electric distribution system in compliance with the codes and standards outlined in 1.4.1 – 1.4.4 above.
- 1.4.6. The customer must provide evidence that the installation has been inspected and approved by state or local code officials, as applicable, prior to its operation in parallel. This information will be submitted with the Certification of Completion.

2. FAST TRACK SCREENING PROCESS

2.1. Applicability

The Distributor will determine if the proposed system can follow the Fast Track process or if the design of the system would require evaluation under the Study Process of Section 3. Generally this process is available to a Customer whose proposed DG equipment is no larger than 1 MW and meets the codes, standards, and certification requirements of 1.4 above.

2.2. Fast Track Review Screens

After Distributor has received a sufficient and complete Interconnection Application, the Distributor shall perform an initial review using the screens set forth below and shall notify the Interconnection Customer of the results.

2.2.1. Generation On Circuit As A Percent of Annual Peak Load

For interconnection of a proposed DG equipment to a radial distribution circuit, the aggregated generation, including the proposed DG Equipment, on the circuit shall not exceed 15 % of the line section annual peak load as most recently measured at the substation. A line section is that portion of a Distributor's electric system connected to a customer bounded by automatic sectionalizing devices or the end of the distribution line.

2.2.2. Maximum Fault Current

The proposed DG Equipment, in aggregation with other generation on the distribution circuit shall not contribute more than 10% to the distribution circuit's maximum fault current at the point on the high voltage (primary) level nearest the proposed point of interconnection.

2.2.3. Short Circuit Interrupting capability

The proposed DG equipment, in aggregate with other generation on the distribution circuit, shall not cause any distribution protective devices and equipment (including, but not limited to, substation breakers, fuse cutouts, and line reclosers), or Customer equipment on the system to exceed 87.5 % of the short circuit interrupting capability; nor shall the interconnection be proposed for a circuit that already exceeds 87.5 % of the short circuit interrupting capability.

2.2.4. Type of Interconnection

Using the table below, determine the type of transformer connection allowable to interconnect a DG with a primary distribution line through a transformer. This screen includes a review of the type of electrical service provided to the Customer, including line configuration and the transformer connection to limit the potential for creating over-voltages on the Distributor's electric power system due to a loss of ground during the operating time of any anti-islanding function.

Primary Distribution Line Type	Type of Interconnection to Primary Distribution Line	Result/Criteria
Three-phase, three wire	3-phase or single phase, phase-to-phase	Pass screen
<i>Three-phase, four wire</i>	<i>Effectively-grounded 3 phase or Single-phase, line-to-neutral</i>	<i>Pass screen</i>

2.2.5. Maximum Size for Single Phase

If the proposed DG Equipment is to be interconnected on single-phase secondary, shared secondary, or individual service, the aggregate generation capacity on the single-phase secondary, shared secondary, or individual service shall not exceed 15 kw.

2.2.6. Load Balance

If the proposed DG Equipment is single-phase and is to be interconnected on a center tap neutral of a 240 volt service, its addition shall not create an imbalance between the two sides of the 240 volt service of more than 20 % of the nameplate rating of the service transformer. If the proposed DG equipment is single-phase and is to be interconnected to a three phase service secondary or service, its addition shall not cause the load on any of the individual phases to exceed twice the load on any of the other two phases.

2.2.7. Transient Stability Problems

The DG Equipment, in aggregate with other generation interconnected to the distribution side of a substation transformer feeding the circuit where the DG Equipment proposes to interconnect shall not exceed 10 MW in an area where there are known, or posted, transient stability limitations to generating units located in the general electrical vicinity (e.g., three or four distribution busses from the point of interconnection).

2.2.8. No Upgrades Required

No construction of facilities by the Distributor on its own system shall be required to accommodate the DG Equipment.

2.3 Fast Track Screening Results

If the proposed DG Equipment passes the screens, the Customer's Application will be approved and Distributor will provide the Customer an executable interconnection agreement. If the proposed project does not pass the screens, the Customer will be notified and offered the opportunity to attend a meeting where the processes outlined in **3.0 Study Process** will be explained and a course of action determined.

3. STUDY PROCESS

The study process (see Figure 3) consists of the minimum engineering review, the system impact study and the facilities study. At an initial meeting, the parties shall determine whether a minimum engineering review is sufficient, or the parties shall proceed directly to a system impact study, or a system upgrade study.

3.1. Minimum Engineering Review

The “Minimum Engineering Review” also known as the Feasibility Study in FERC Order 2006 is designed to identify any adverse system impacts that would result from interconnection of the DG Equipment. Examples of such negative impacts would include exceeding the short circuit capability rating of any breakers, violations of thermal overload or voltage limits, and a review of grounding requirements and electric system protection. If Distributor determines that the Minimum Engineering Review will require substantial time, Distributor may ask customer to reimburse Distributor for the costs associated with this review.

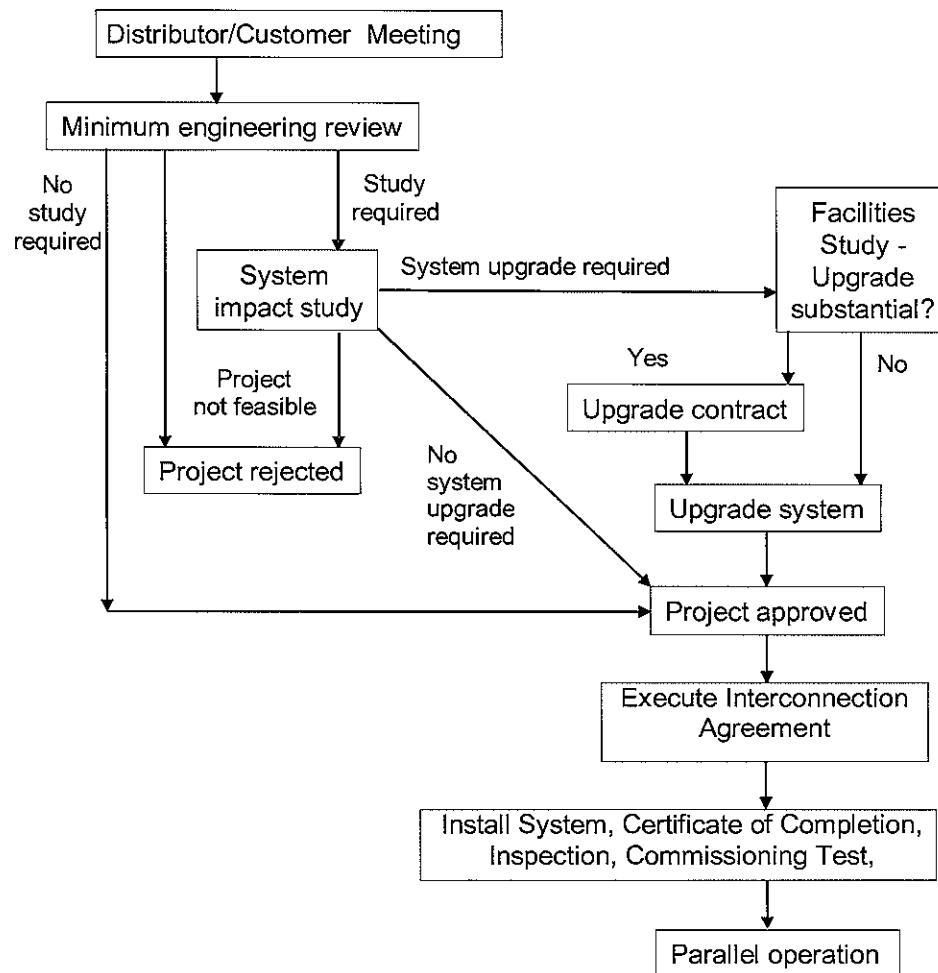


Figure 2. The Study Process

3.2. System Impact and Facilities Studies

Beyond the minimum engineering review (or feasibility review), the study process includes the System Impact Study and the Facilities Study. A system impact study is designed to identify and detail the electric system impacts that would result if the proposed project were interconnected without project modifications or electric system modifications, focusing on the adverse system impacts identified in the feasibility study. A system impact study shall evaluate the impact of the proposed interconnection on the reliability of the electric system.

In instances where the system impact study shows potential for distribution system adverse impacts, the Distributor shall send the Customer a distribution system impact study agreement, including an outline of the scope of the study and a non-binding good faith estimate of the cost to perform the study, if such a study is required. Once the customer agrees to pay the cost of the study, the process continues.

Once the required system impact study is complete, a facilities study agreement if needed, including an outline of the scope of the study and a non-binding good faith estimate of the cost to perform the facilities study, shall be sent to the customer. Design for any required Interconnection Facilities and/or Upgrades shall be performed under the facilities study agreement. Upon completion of the facilities study, and with the agreement of the Customer to pay for Interconnection Facilities and Upgrades identified in the facilities study, the Distributor shall provide the Customer an executable interconnection agreement.

Attachment 1 -- Application for Interconnection of Distributed Generation

Tier 1(10 kW or less)

This Application is considered complete when it provides all applicable and correct information required below.

Customer

Name: _____

Address: _____

City: _____ State: _____ Zip: _____

Telephone (Day): _____ (Evening): _____

Fax: _____ E-Mail Address: _____

Electric Service Account Number _____

Owner of Building if different than customer _____

Contact (if different from Customer)

Name: _____

Address: _____

City: _____ State: _____ Zip: _____

Telephone (Day): _____ (Evening): _____

Fax: _____ E-Mail Address: _____

Owner of System (If different than customer)

Name: _____

Address: _____

City: _____ State: _____ Zip: _____

Telephone (Day): _____ (Evening): _____

Fax: _____ E-Mail Address: _____

ELECTRICAL CONTRACTOR (as applicable)

Company: _____

Mailing Address: _____

City: _____ County: _____ State: _____ Zip Code: _____

Phone Number: _____ Representative: _____

Email Address: _____ Fax Number: _____

Contractor's License # _____ City/County/State _____

Generating Facility Information

Location (if different from above): _____

Distributor: _____

Account Number: _____

Inverter Manufacturer: _____ Model _____

Nameplate Rating: _____ (kW) _____ (kVA) _____ (AC Volts) Single Phase _____ Three Phase _____

System Design Capacity: _____ (kW) _____ (kVA)

Energy Source: Solar Wind Hydro Other (describe) _____

Attach support information to show testing and listing by a Nationally Recognized Laboratory for compliance with the codes and standards outlined in 1.4.1 – 1.4.4 for the proposed system .

Estimated Installation Date: _____ Estimated In-Service Date: _____

List components of the Small Generating Facility equipment package that are currently certified:

Equipment Type	Certifying Entity
1. _____	_____
2. _____	_____
3. _____	_____
4. _____	_____
5. _____	_____

ADDITIONAL INFORMATION – Single Line Diagram

In addition to the items listed above, please attach a detailed one-line diagram of the proposed facility, all applicable elementary diagrams, major equipment, (generators, transformers, inverters, circuit breakers, protective relays, batteries, number and location of PV Panels, etc.) specifications, test reports, etc., and any other applicable drawings or documents necessary for the proper design of the interconnection. Also describe the address or grid coordinates of the facility.

Permission to Interconnect

Customer must not operate their generating facility in parallel with Distributor’s system until they receive written authorization for parallel operation from Distributor. Unauthorized parallel operation could result in injury to persons and /or damage to equipment and/or property for which the customer may be liable.

Interconnection Customer Signature

I hereby certify that, to the best of my knowledge, the information provided in this Application is true.

Signed: _____

Title: _____ Date: _____

**Attachment 2 -- Application for Interconnection of Distributed Generation
Tier 2 (Greater than 10 kW and less than or equal to 100 kW)
& Tier 3(Greater than 100 kW and less than 1 MW)**

This application should be completed and returned to the Distributor representative in order to begin processing the request.

PART 1

CUSTOMER INFORMATION

Name: _____
Mailing Address: _____
City: _____ County: _____ State: _____ Zip Code: _____
Phone Number: _____ Representative: _____
Email Address: _____ Electric Service Account Number _____
Fax Number: _____

PROJECT DESIGN/ENGINEERING (as applicable)

Company: _____
Mailing Address: _____
City: _____ County: _____ State: _____ Zip Code: _____
Phone Number: _____ Representative: _____
Email Address: _____ Fax Number: _____
PE License _____ State _____

ELECTRICAL CONTRACTOR (as applicable)

Company: _____
Mailing Address: _____
City: _____ County: _____ State: _____ Zip Code: _____
Phone Number: _____ Representative: _____
Email Address: _____ Fax Number: _____
Contractor's License # _____ City/County/State _____

TYPE OF GENERATOR (as applicable)

Photovoltaic _____ Wind _____ Other _____

ESTIMATED LOAD AND GENERATOR RATING INFORMATION

The following information is necessary to help properly design the Distributor customer interconnection.

Total Site Load _____ (Highest kW Demand Last 12 Months)
Residential _____ Commercial _____ Industrial _____
System Rating _____ (kW) Annual Estimated Generation _____ (kWh)

PART 2

(Complete all applicable items. Copy this page as required for additional generators)

SYNCHRONOUS GENERATOR DATA

Identification per Single Line Drawing: _____
Total number of units with listed specifications on site: _____
Manufacturer: _____
Type: _____ Date of manufacture: _____
Serial Number (each): _____
Phases: Single _____ Three _____ R.P.M.: _____ Frequency (Hz): _____
Rated Output (for one unit): _____ Kilowatt _____ Kilovolt-Ampere
Rated Power Factor (%): _____ Rated Voltage (Volts): _____ Rated Amperes: _____
Field Volts: _____ Field Amps: _____ Motoring power (kW): _____
Synchronous Reactance (Xd): _____ % on _____ KVA base
Transient Reactance (X'd): _____ % on _____ KVA base
Negative Sequence Reactance (Xs): _____ % on _____ KVA base
Sequence Reactance (Xo): _____ % on _____ KVA base
Neutral Grounding Resistor Size (if applicable): _____
 I_2^2t or K (heating time constant): _____
Additional information: _____

.....

INDUCTION GENERATOR DATA

Rotor Resistance (Rr): _____ ohms Stator Resistance (Rs): _____ ohms
Rotor Reactance (Xr): _____ ohms Stator Reactance (Xs): _____ ohms
Magnetizing Reactance (Xm): _____ ohms Short Circuit Reactance (Xd''): _____ ohms
Design letter: _____ Frame Size: _____
Exciting Current: _____ Temp Rise (deg C°): _____
Reactive Power Required: _____ Vars (no load), _____
Vars (full load) Additional information: _____

PRIME MOVER (Complete all applicable items)

Identification per Single Line Diagram _____ Unit Number: _____
Type: _____
Manufacturer: _____
Serial Number: _____ Date of manufacture: _____
H.P. Rated: _____ H.P. Max.: _____ Inertia Constant: _____ lb.-ft.²
Energy Source (hydro, wind, etc.) _____

INVERTER DATA (if applicable)

Manufacturer: _____ Model: _____
Rated Power Factor (%): _____ Rated Voltage (Volts): _____ Rated Amperes: _____
Inverter Type (ferroresonant, step, pulse-width modulation, etc): _____
Single or Three Phase _____ Type commutation: forced _____ line _____
Harmonic Distortion: Maximum Single Harmonic (%) _____
Maximum Total Harmonic (%) _____
.....

POWER CIRCUIT BREAKER (if applicable)

Manufacturer: _____ Model: _____
Rated Voltage (kilovolts): _____ Rated ampacity (Amperes) _____
Interrupting rating (Amperes): _____ BIL Rating: _____
Interrupting medium / insulating medium (ex. Vacuum, gas, oil) _____ / _____
Control Voltage (Closing): _____ (Volts) AC DC
Control Voltage (Tripping): _____ (Volts) AC DC Battery Charged Capacitor
Close energy: Spring Motor Hydraulic Pneumatic Other: _____
Trip energy: Spring Motor Hydraulic Pneumatic Other: _____
Bushong Current Transformers: _____ (Max. ratio) Relay Accuracy Class: _____
Multi ratio? No Yes: (Available taps) _____
Description of Control System _____

ADDITIONAL INFORMATION - Single Line Diagram

In addition to the items listed above, please attach a detailed one-line diagram of the proposed facility, all applicable elementary diagrams, major equipment, (generators, transformers, inverters, circuit breakers, protective relays, batteries, number and location of PV Panels, etc.) specifications, test reports, etc., and any other applicable drawings or documents necessary for the proper design of the interconnection. Also describe the address or grid coordinates of the facility.

PERMISSION TO INTERCONNECT

Customer must not operate their generating facility in parallel with Distributor's system until they receive written authorization for parallel operation from Distributor. Unauthorized parallel operation could result in injury to persons and /or damage to equipment and/or property for which the customer may be liable.

END OF PART 2

SIGN OFF AREA

The customer agrees to provide the Distributor with any additional information required to complete the interconnection.

Applicant

Date

DISTRIBUTOR CONTACT FOR APPLICATION SUBMISSION AND FOR MORE INFORMATION:

Distributor contact: _____

Title: _____

Address: _____

Phone: _____ Fax: _____

E-mail: _____